


SOT-89 Plastic-Encapsulate Transistors

FEATURES

- Low Collector-Emitter Saturation Voltage
- Large Collector Power Dissipation and Current
- Mini Power Type Package
- Transistors NPN

MECHANICAL DATA

- Case style:SOT-89molded plastic
- Mounting position:any

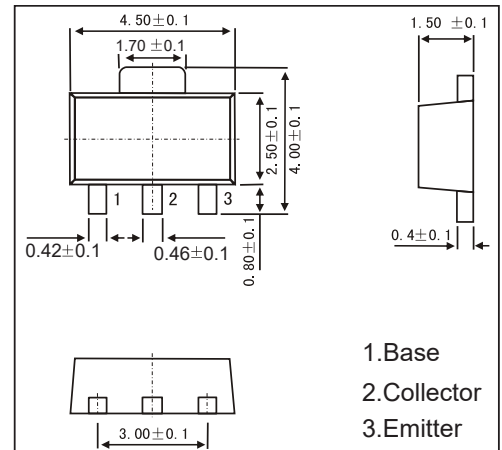

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V _{CB0}	40	V
Collector - Emitter Voltage	V _{CEO}	30	
Emitter - Base Voltage	V _{EB0}	7	
Collector Current - Continuous	I _c	5	A
Collector Power Dissipation	P _c	750	mW
Thermal Resistance From Junction To Ambient	R _{θJA}	167	°C/W
Junction Temperature	T _J	150	°C
Storage Temperature Range	T _{stg}	-55 to +150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V _{CB0}	I _c = 100 μA, I _E = 0	40			V
Collector- emitter breakdown voltage	V _{CEO}	I _c = 1 mA, I _B = 0	30			
Emitter - base breakdown voltage	V _{EB0}	I _E = 100 μA, I _C = 0	7			
Collector-base cut-off current	I _{CB0}	V _{CB} = 10 V, I _E = 0			100	nA
Emitter cut-off current	I _{EB0}	V _{EB} = 7V, I _C =0			100	
Collector-emitter saturation voltage	V _{CE(sat)}	I _C =3 A, I _B =100mA			1	V
Base - emitter saturation voltage	V _{BE(sat)}	I _C =3 A, I _B =100mA			1.2	
DC current gain	h _{FE(1)}	V _{CE} = 2V, I _C = 1mA		200		
	h _{FE(2)}	V _{CE} = 2V, I _C = 500mA	230		800	
	h _{FE(3)}	V _{CE} = 2V, I _C = 2A	150			
Collector output capacitance	C _{ob}	V _{CB} = 20V, I _E = 0, f=1MHz			50	pF
Transition frequency	f _T	V _{CE} = 6V, I _C = 50mA, f=200MHz		150		MHz

RATINGS AND CHARACTERISTIC CURVES

