

TO-92 Plastic-Encapsulate Transistors


FEATURES

- Power dissipation
- TRANSISTOR (PNP)

MECHANICAL DATA

- Case style:TO-92 molded plastic
- Mounting position:any

TO-92

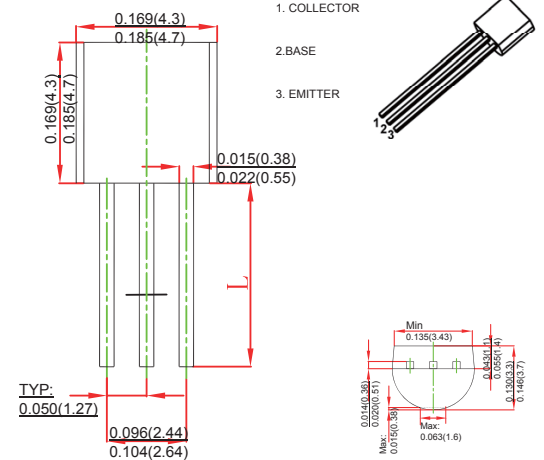

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	BC327 -50 BC328 -30	V
V_{CEO}	Collector-Emitter Voltage	BC327 -45 BC328 -25	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current -Continuous	-800	mA
P_C	Collector Power Dissipation	625	mW
T_j	Junction Temperature	150	°C
T_{stg}	Storage Temperature	-55~+150	°C

ELECTRICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V_{CBO}	$I_C = -100\mu\text{A}$, $I_E = 0$	-50 -30			V
Collector-emitter breakdown voltage	V_{CEO}	$I_C = -10\text{mA}$, $I_B = 0$	-45 -25			V
Emitter-base breakdown voltage	V_{EBO}	$I_E = -10\mu\text{A}$, $I_C = 0$	-5			V
Collector cut-off current	I_{CBO}	$V_{CB} = -45\text{V}$, $I_E = 0$ $V_{CB} = -25\text{V}$, $I_E = 0$			-0.1 -0.1	μA
Collector cut-off current	I_{CEO}	$V_{CE} = -40\text{V}$, $I_B = 0$ $V_{CE} = -20\text{V}$, $I_B = 0$			-0.2 -0.2	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = -4\text{V}$, $I_C = 0$			-0.1	μA
DC current gain	$h_{FE(1)}$	$V_{CE} = -1\text{V}$, $I_C = -100\text{mA}$	100		630	
	$h_{FE(2)}$	$V_{CE} = -1\text{V}$, $I_C = -300\text{mA}$	40			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -500\text{mA}$, $I_B = -50\text{mA}$			-0.7	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = -500\text{mA}$, $I_B = -50\text{mA}$			-1.2	V
Base-emitter voltage	V_{BE}	$V_{CE} = -1\text{V}$, $I_C = -300\text{mA}$			-1.2	V
Transition frequency	f_T	$V_{CE} = -5\text{V}$, $I_C = -10\text{mA}$ $f = 100\text{MHz}$	260			MHz
Collector Output Capacitance	C_{ob}	$V_{CB} = -10\text{V}$, $I_E = 0$ $f = 1\text{MHz}$		12		pF

CLASSIFICATION OF h_{FE}

Rank	16	25	40
Range	100-250	160-400	250-630



RATINGS AND CHARACTERISTIC CURVES

Typical Characteristics

