

## TO-92 Plastic-Encapsulate Transistors




### FEATURES

- Low Current
- High Voltage
- TRANSISTOR (NPN)

### MECHANICAL DATA

- Case style:TO-92 molded plastic
- Mounting position:any

### TO-92

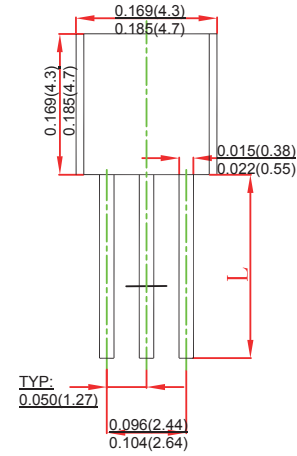

## MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

| Symbol          | Parameter                                   | Value    | Unit |
|-----------------|---------------------------------------------|----------|------|
| $V_{CBO}$       | Collector-Base Voltage                      | 200      | V    |
| $V_{CEO}$       | Collector-Emitter Voltage                   | 200      | V    |
| $V_{EBO}$       | Emitter-Base Voltage                        | 6        | V    |
| $I_C$           | Collector Current                           | 0.2      | A    |
| $P_C$           | Collector Power Dissipation                 | 625      | mW   |
| $R_{\theta JA}$ | Thermal Resistance From Junction To Ambient | 200      | °C/W |
| $T_j$           | Junction Temperature                        | 150      | °C   |
| $T_{stg}$       | Storage Temperature                         | -55~+150 | °C   |


### ORDERING INFORMATION

| Part Number | Package | Packing Method | Pack Quantity |
|-------------|---------|----------------|---------------|
| MPSA43      | TO-92   | Bulk           | 1000pcs/Bag   |
| MPSA43-TA   | TO-92   | Tape           | 2000pcs/Box   |

| Parameter                            | Symbol             | Test conditions                  | Min | Typ | Max | Unit    |
|--------------------------------------|--------------------|----------------------------------|-----|-----|-----|---------|
| Collector-base breakdown voltage     | $V_{(BR)CBO}$      | $I_C=0.1mA, I_E=0$               | 200 |     |     | V       |
| Collector-emitter breakdown voltage  | $V_{(BR)CEO}^*$    | $I_C=1mA, I_B=0$                 | 200 |     |     | V       |
| Emitter-base breakdown voltage       | $V_{(BR)EBO}$      | $I_E=0.1mA, I_C=0$               | 6   |     |     | V       |
| Collector cut-off current            | $I_{CBO}$          | $V_{CB}=160V, I_E=0$             |     |     | 0.1 | $\mu A$ |
| Emitter cut-off current              | $I_{EBO}$          | $V_{EB}=4V, I_C=0$               |     |     | 0.1 | $\mu A$ |
| DC current gain                      | $h_{FE(1)}^*$      | $V_{CE}=10V, I_C=1mA$            | 25  |     |     |         |
|                                      | $h_{FE(2)}^*$      | $V_{CE}=10V, I_C=10mA$           | 40  |     | 200 |         |
|                                      | $h_{FE(3)}^*$      | $V_{CE}=10V, I_C=30mA$           | 50  |     |     |         |
| Collector-emitter saturation voltage | $V_{CE(sat)(1)}^*$ | $I_C=20mA, I_B=2mA$              |     |     | 0.4 | V       |
| Base-emitter saturation voltage      | $V_{BE(sat)}^*$    | $I_C=20mA, I_B=2mA$              |     |     | 0.9 | V       |
| Transition frequency                 | $f_T$              | $V_{CE}=20V, I_C=10mA, f=100MHz$ | 50  |     |     | MHz     |
| Collector output capacitance         | $C_{ob}$           | $V_{CB}=20V, I_E=0, f=1MHz$      |     |     | 4   | pF      |


\*Pulse test: pulse width  $\leq 300\mu s$ , duty cycles  $\leq 2.0\%$ .

## TO-92 PACKAGE TAPEING DIMENSION

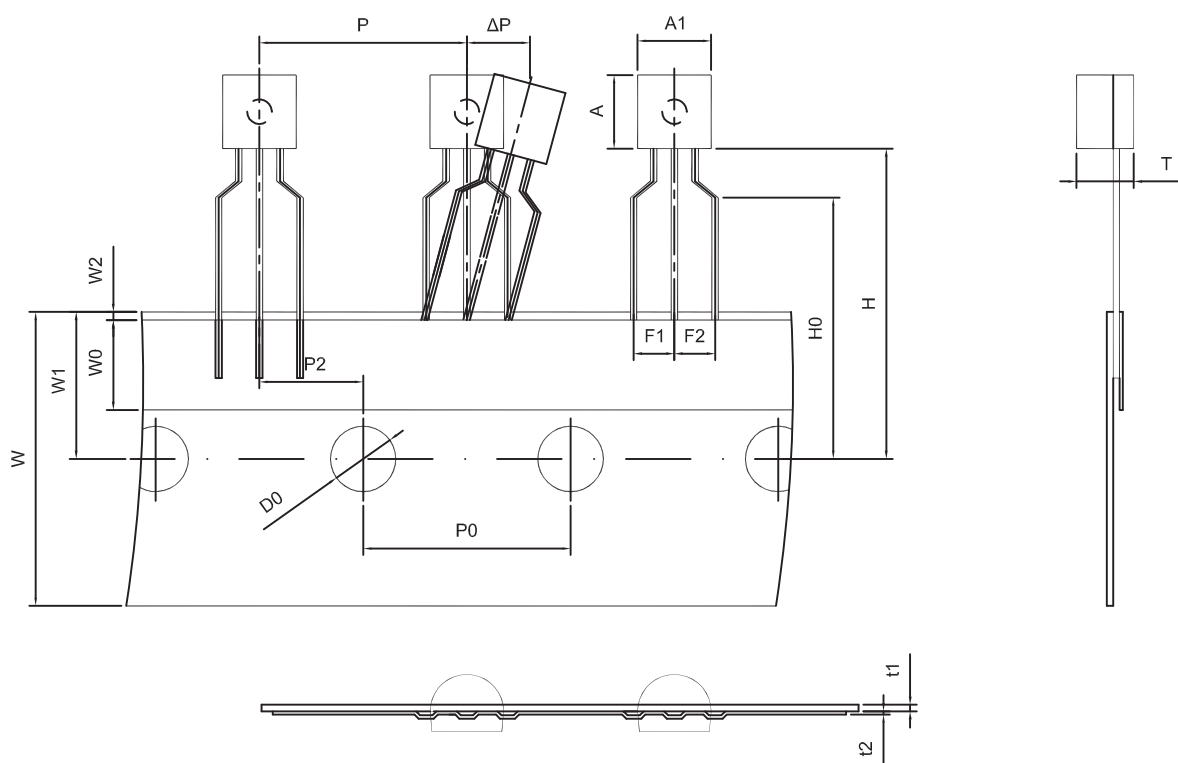

Dimiensions are in millimeter

| A1  | A   | T        | P    | P0   | P2   | F1  | F2  | W    |
|-----|-----|----------|------|------|------|-----|-----|------|
| 4.5 | 4.5 | 3.5      | 12.7 | 12.7 | 6.35 | 2.5 | 2.5 | 18.0 |
| W0  | W1  | W2       | H    | H0   | D0   | t1  | t2  | ΔP   |
| 6.0 | 9.0 | 1.0 MAX. | 19.0 | 16.0 | 4.0  | 0.4 | 0.2 | 0    |

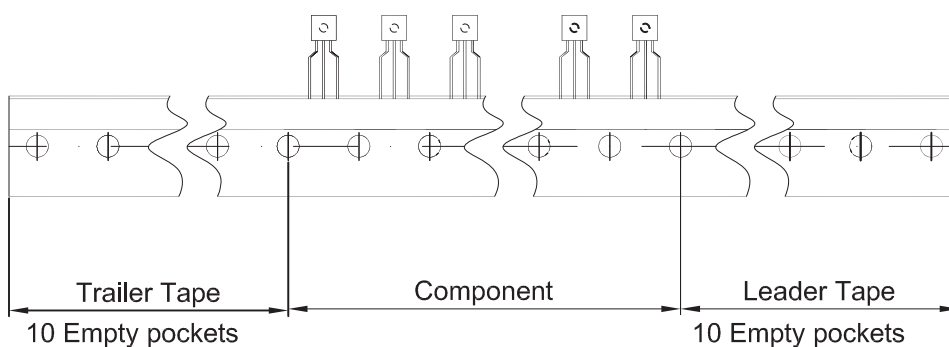

| Package | Box      | Box Size(mm) | Carton     | Carton Size(mm) |
|---------|----------|--------------|------------|-----------------|
| TO-92   | 2000 pcs | 333×162×43   | 20,000 pcs | 350×340×250     |